

DRF4431F27/DRF4432F27
27dBm ISM RF Transceiver Module

V1.20

Features:

- Frequency Range: 433/868MHz
- Modulation: FSK/GFSK/OOK
- SPI Data Interface
- Sensitivity: -122dBm
- Output Power: +27dBm
- Data Rate: -0.123~256 kbps
- Digital RSSI
- Wake-up Timer
- 64 bytes TX/RX FIFOs
- Integrated Voltage Regulator
- Frequency Hopping Capability
- Temperature sensor and 8-bit ADC
- Working Temperature: -20°C ~+60°C
- Standby current: $\leq 3\mu\text{A}$
- Supply voltage: 3.3~6.0V



Applications

- Remote Control
- Remote AMR
- Home Automation
- Personal data logger
- Wireless sensor network
- Remote Keyless entry
- Wireless PC peripherals

DESCRIPTION

DRF4431F27/DRF4432F27 is a type of low cost RF front-end transceiver module based on SI4431/SI4432 from Silicon labs. It keeps all the advantages of RFIC SI4431/SI4432 but simplifies the circuit design. The high sensitivity (-122dBm) and 27dBm output power make the module suitable for long range applications. DRF4431F27/DRF4432F27 module consists of RFIC Si4431/SI4431, thin SMD crystal, LDO and PA circuit. The antenna port is well matched to standard 50 Ohm impedance. Users don't need to spend time in RF circuit design. It is fully compatible with DRF4431F13 and DRF4432F20 modules.

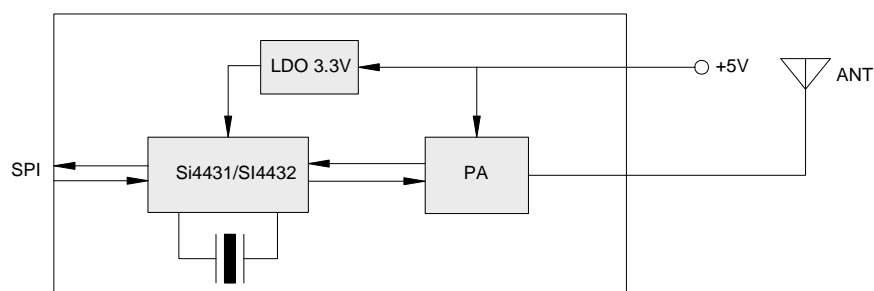


Figure 1: Function Block

PIN FUNCTIONS

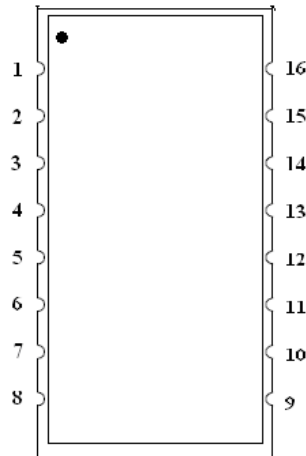


Figure 2: DRF4431F27/DRF4432F27 Pin Layout

PIN	Name	Function	Description
1	ANT	Output	50 Ohm Impedance
2	GND	Ground	Ground (0V)
3	NC	---	No connection
4	NC	---	No connection
5	GPIO2	Input/ Output	General purpose Input/Output pin
6	SDO	Output	SPI data output pin
7	SDI	Input	SPI data input pin
8	SCLK	Input	SPI data clock pin
9	GND	Ground	Ground (0V)
10	nSEL	Input	SPI select pin
11	nIRQ	Onput	Interrupt status output pin
12	SDN	Input	Shutdown Input pin
13	NC	---	No connection
14	NC	---	No connection
15	GND	Ground	Ground (0V)
16	VCC	Power	+ 5.0V

Table 1: DRF4431F27/DRF4432F27 Pin Functions

ELECTRICAL SPECIFICATIONS

Symbol	Parameter (condition)	Min.	Typ.	Max.	Units
VCC	Supply Voltage	3.3	5	6.0	V
Temp	Operating temperature range	-20	25	60	°C
Freq	Frequency range	428 863	433 868	438 873	MHz
F _{DEV}	Modulation deviation @433MHz @868MHz	±0.625 ±0.625	--- ---	±160 ±320	KHz
RES _{RSSI}	RSSI resolution		±0.5		dB
I _{DD_R}	Current in receive mode @ 433Mhz @868Mhz		20.5 20.5		mA
I _{DD_T} ⁽¹⁾	Current in transmit mode @ 433Mhz @ 868Mhz		320 320		mA
I _{DD_S}	Current in sleep mode.			3	uA
P _{out}	Output power @ 433Mhz @ 868Mhz			27 27	dBm
Sen. ⁽²⁾	Receiver sensitivity @ 433Mhz @ 868Mhz	-122 -122	-120 -120		dBm
DR _{FSK}	FSK data rate	0.123		256	Kbps
CH _{BW}	Receiver channel spacing	2.6	---	620	kHz
Z _{ANT}	Antenna Impedance		50		Ohm

Table 2: DRF4431F27/DRF4432F27 Electrical Specifications

Notes:

- (1) Transmit current is tested at the Max. output power.
- (2) Sensitivity is measured at DR_{FSK} = 1.2k bps and F_{DEV} = 30 kHz

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Min.	Max.	Units
VCC	Supply Voltage	-0.3	3.6	V
VI	Input voltage	-0.3	VCC+0.3	V
VO	Output voltage	-0.3	VCC+0.3	V
T _{ST}	Storage temperature	-55	125	°C

Table 3: DRF4431F27/DRF4432F27 Maximum Ratings

TYPICAL APPLICATION CIRCUIT

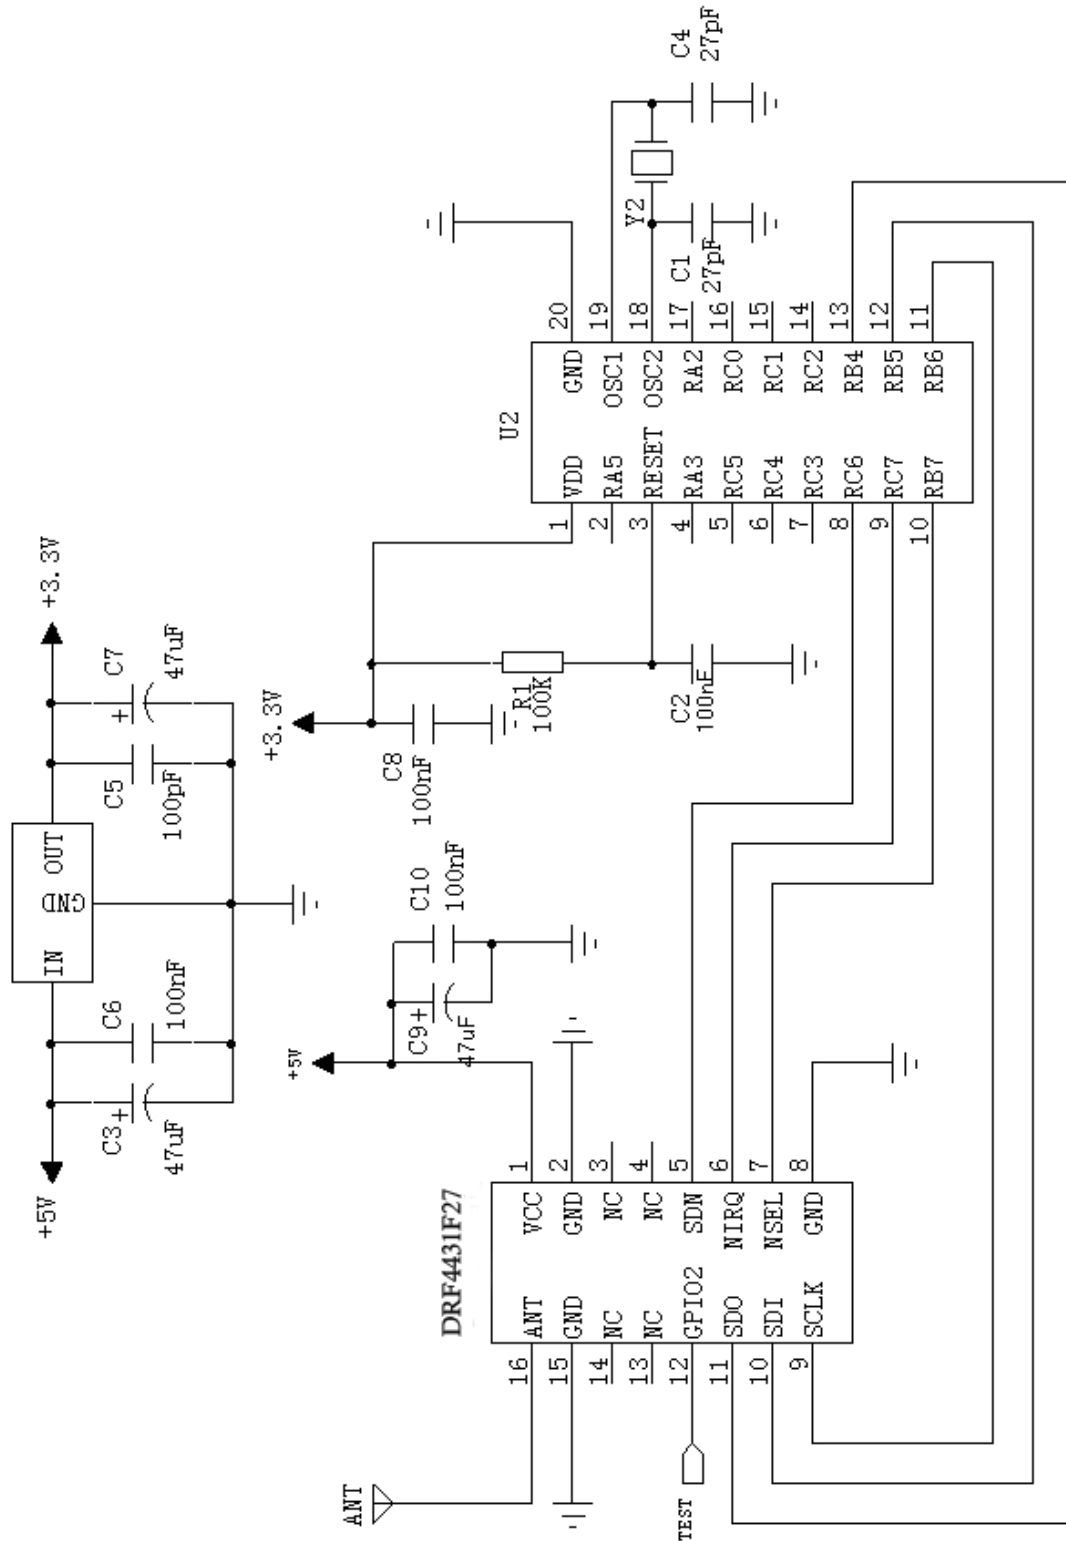


Figure 3: Application Circuit

MECHANICAL DATA

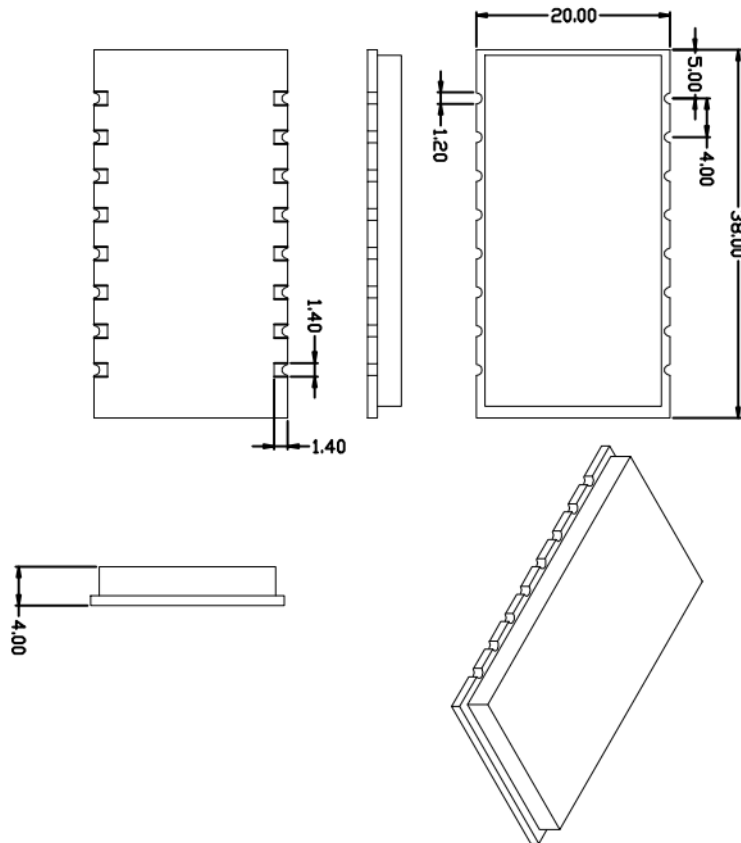


Figure 4: Mechanical Dimension

ORDERING INFORMATION

DRF 4431 F 27 — 043 S 1

- ① ② ③ ④ ⑤ ⑥ ⑦

Num	Symbol	Meaning
①	RF module	RF FSK/GFSK module
②	IC Type	4431: SI4431 4432:SI4432
③	Module Function	RF front-end module
④	Power	27dBm output power
⑤	Freq. Band	043: 433MHz 086:868MHz
⑥	Package	SMD package
⑦	Receive band	1: wideband 2: narrow band

Table 4: Ordering Information

Please note that DRF4431F27 and DRF4432F27 are fully compatible in dimension and function so they can be interchanged. For some DRF4431F27 modules, their PCB boards also use the silkscreen DRF4432F27 so the actual part type is determined by the label on the top of modules.

<p>Dorji Applied Technologies A division of <i>Dorji Industrial Group Co., Ltd</i></p> <p>Add.: Xinchenuayuan 2, Dalangnanlu, Longhua, Baoan district, Shenzhen, China 518109</p> <p>Tel: 0086-755-28156122 Fax.: 0086-755-28156133 Email: sales@dorji.com Web: http://www.dorji.com</p>	<p>Dorji Industrial Group Co., Ltd reserves the right to make corrections, modifications, improvements and other changes to its products and services at any time and to discontinue any product or service without notice. Customers are expected to visit websites for getting newest product information before placing orders.</p> <p>These products are not designed for use in life support appliances, devices or other products where malfunction of these products might result in personal injury. Customers using these products in such applications do so at their own risk and agree to fully indemnify Dorji Industrial Group for any damages resulting from improper use.</p>
--	---